
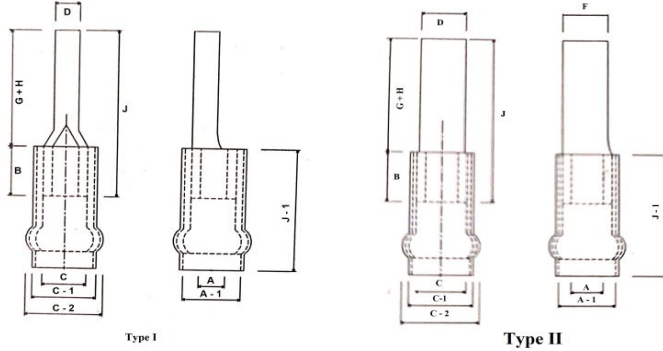


COPPER PIN TYPE INSULATED WITH METAL REINFORCEMENT TERMINAL

Material Copper IS : 1897 :: Finished Electro Tinned

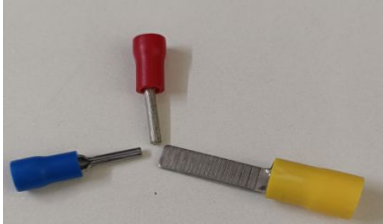

All dimensions in mm

Size mm ²	A	C	D	F	B	G+H	J	A-1	C-1	C-2	TYPE	CORDLUG CAT NO.
1.5	1.6	3.2	1.9	0.8	5.0	10.0	17.0	3.6	4.8	5.4	I	LPD-26
1.5	1.6	3.2	3.1	0.8	5.0	10.0	17.0	3.6	4.8	5.4	I	LPD-40
2.5	2.3	3.9	1.9	0.8	5.0	10.0	17.0	4.4	5.4	6	I	LPD-27
2.5	2.3	3.9	3.1	0.8	5.0	10.0	17.0	4.4	5.4	6	II	LPD-28
4.0	2.9	4.9	2.7	1.0	6.0	10.0	20.0	6.4	7.2	8.6	I	LPD-29
4.0	3.6	5.6	5.1	1.0	6.0	10.0	20.0	6.4	7.2	8.6	II	LPD-30
6.0	3.6	5.6	2.7	1.0	6.0	10.0	20.0	6.4	7.2	8.6	I	LPD-31
6.0	4.0	6.0	2.7	1.0	6.0	10.0	20.0	6.4	7.2	8.6	I	LPD-32